


733 Horizontal Mortise Lock

OPERATION:

Latch bolt operated by knob both sides. Outer knob may be set by stop. When outer knob is stopped, latch bolt is operated by key from outside. Dead bolt operated by key outside, thumb turn inside.

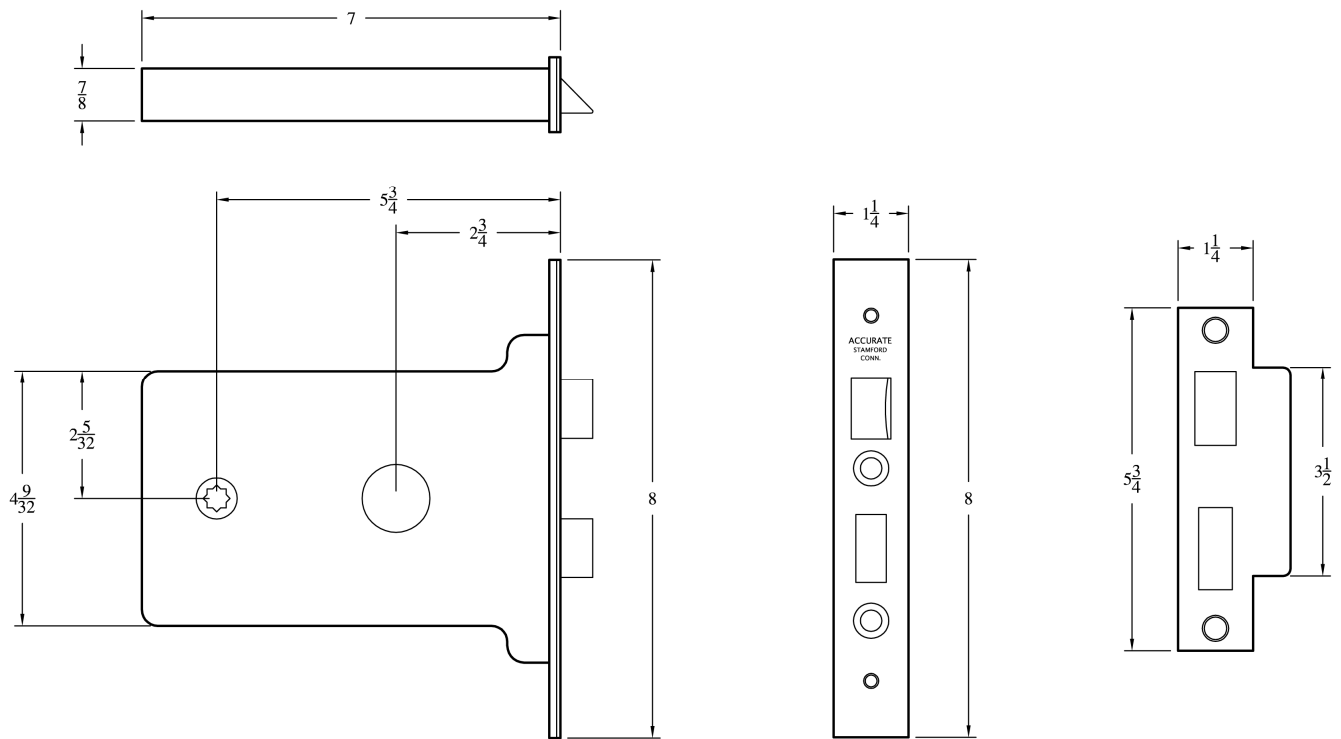

LATCH BOLT:

Arguto type, 1/2" throw

DEAD BOLT:

1/2" throw

BACKSET:

2 3/4" to cylinder, 5 3/4" to knob

CASE:

Cast iron (Annealed) Japan Black

HAND:

Must be specified when ordering

HUB:

Bronze, 3/8" only

FRONT:

No. 2 bevel (1/8" in 2")

BASE FRONT:

Steel

ARMOR FRONT:

Wrought brass or bronze-Prevents tampering with cylinder set screw

STRIKE:

Wrought brass or bronze-Wrought box available to order

SCREWS-Lock Attaching:

Wood Doors:

(2) No. 12 x 1 1/4" flat head steel wood screws

Metal Doors:

(2) No. 12-24 x 1/2" flat shallow head steel machine screws

SCREWS-Strike Attaching:

Wood Frames:

(2) No. 12 x 1 1/4" flat Phillips head wood screws, brass or bronze

Metal Frames:

(2) No. 12-24 x 1/2" flat shallow Phillips head machine screws, brass or bronze.